


462A011 to 060

Transition, One to Three
Cables

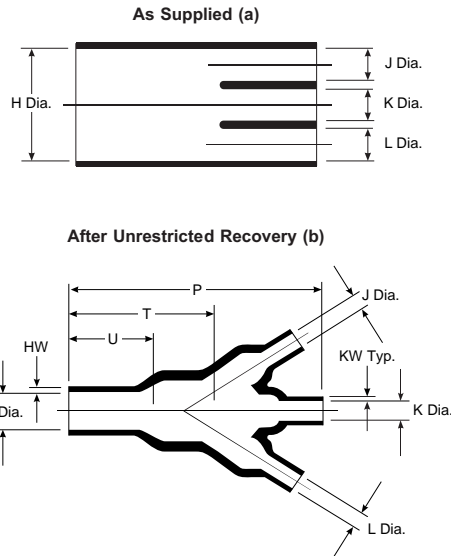

Applications

Provides strain relief and mechanical protection on cable harness assemblies.

Materials Available

Material*	Material Description	Precoating No.	Adhesive Part Number**
-3	Semirigid polyolefin	/42 or /86	S-1017 or S-1048
-4	Flexible polyolefin	/42 or /86	S-1017 or S-1048
-12	Fluoroelastomer	N/A	S-1255-04
-25	Fluid-resistant elastomer	/42 or /86 or /225	S-1017 or S-1048 or S-1125
-100	Polyolefin, Zerohal	/86 or /180	S-1048 or S-1030

* For more information, please see the appropriate material page in this section.

** For more information, please see pages 12-206 to 12-211.


Product Dimensions

Part Number	H		J, K&L		P ± 10% b
	Min. a	Max. b	Min. a	Max. b	
462A011	13.2 [1.52]	6.6 [0.26]	6.6 [0.26]	3.6 [0.14]	46.2 [1.82]
462A023	26.9 [1.06]	13.2 [0.52]	13.2 [0.52]	6.9 [0.27]	93.2 [3.67]
462A034	38.6 [1.52]	18.8 [0.74]	19.3 [0.76]	9.7 [0.38]	135.1 [5.32]
462A046	55.6 [2.19]	25.4 [1.00]	26.9 [1.06]	12.4 [0.49]	192.0 [7.56]
462A060	91.4 [3.60]	54.6 [2.15]	45.7 [1.80]	27.4 [1.08]	390.4 [15.37]

Part Number	T ± 10% b	U ± 10% b	HW ± 20% b	KW ± 10% b
462A011	30.5 [1.20]	15.7 [0.62]	1.52 [0.06]	1.02 [0.04]
462A023	57.2 [2.25]	33.0 [1.30]	2.54 [0.10]	1.52 [0.06]
462A034	88.9 [3.50]	45.7 [1.80]	3.05 [0.12]	1.78 [0.07]
462A046	121.9 [4.80]	71.1 [2.80]	4.57 [0.18]	3.05 [0.12]
462A060	254.0 [10.00]	127.0 [5.00]	7.11 [0.28]	4.57 [0.18]

Note: Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by 1.5 [0.06] max.

Slimline Transition, One to Three Cables

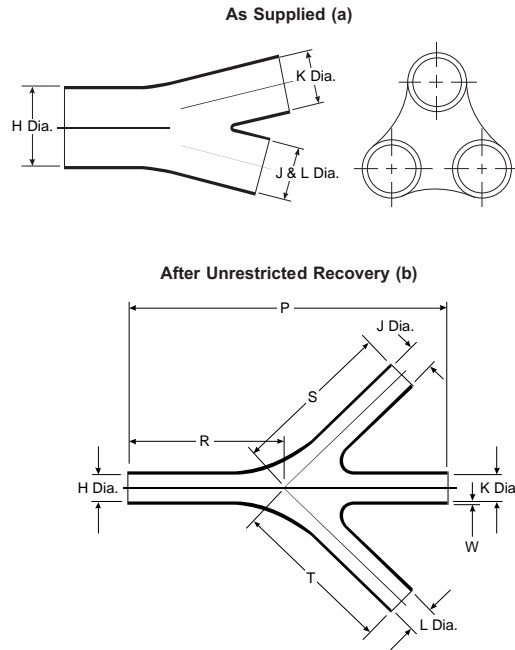

12

Heat-Shrink Tubing,
Molded Parts and Adhesives

Applications

Provides strain relief and mechanical protection on cable harness assemblies.

Materials Available

Material*	Material Description	Precoating No.	Adhesive Part Number**
-50	Fluoroelastomer polymer blend	N/A	S-1125
-51	Elastomer polymer blend	/164	S-1124
-71	Flexible polyolefin	/42 or /86	S-1017 or S-1048

Product Dimensions

Part Number	H		J, K & L		W Nom. b	P Nom. b	R, S & T Nom. b
	Min. a	Max. b	Min. a	Max. b			
462A421	19.8 [.78]	6.6 [.26]	13.2 [.52]	6.6 [.26]	1.0 [.04]	85.9 [3.38]	42.9 [1.69]
462A422	34.3 [1.35]	11.4 [.45]	20.6 [.81]	11.4 [.45]	1.3 [.05]	135.6 [5.34]	67.8 [2.67]
462A423	60.2 [2.37]	20.1 [.79]	36.1 [1.42]	20.1 [.79]	1.5 [.06]	207.3 [8.16]	103.6 [4.08]
462A424*	99.8 [3.93]	33.3 [1.31]	54.9 [2.16]	33.3 [1.31]	1.8 [.07]	207.2 [8.16]	103.6 [4.08]

*-01 modification only

Materials Available

Material*	Material Description	Precoating No.	Adhesive Part Number**
-125	Fluoropolymer	—	S-1255-04

* For more information, please see the appropriate material page in this section.

** For more information, please see pages 12-206 to 12-211.

Product Dimensions

Part Number	H		J, K & L		W Nom. b	P Nom. b	R, S & T Nom. b
	Min. a	Max. b	Min. a	Max. b			
462A421	19.8 [.78]	6.6 [.26]	13.2 [.52]	6.6 [.26]	1.0 [.04]	85.9 [3.38]	42.9 [1.69]
462A422	34.3 [1.35]	11.4 [.45]	20.6 [.81]	11.4 [.45]	1.3 [.05]	135.6 [5.34]	67.8 [2.67]
462A423	60.2 [2.37]	20.1 [.79]	36.1 [1.42]	20.1 [.79]	1.5 [.06]	207.3 [8.16]	103.6 [4.08]

Note: Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by 1.5 [.06] max.